



Lit XS

Lit XS Applique – Bollard

220 240V	50 60Hz	CL II	IP66	IK08	Ta -30°C +50°C
-------------	------------	-------	------	------	----------------------



DATI PRESTAZIONALI

Flusso sorgente: 710lm (applique), 640-685lm (bollard)
Potenza sorgente: 9.5W (applique), 4.2W (bollard)
Temperatura colore: 3000K, 4000K
Indice di resa cromatica: CRI≥80, SMCDS3
Illuminazione intelligente: DALI su richiesta

PERFORMANCE DATA

Source Flux: 710lm (applique), 640-685lm (bollard)
Source Power: 9.5W (applique), 4.2W (bollard)
Colour Temperature: 3000K, 4000K
Colour Rendering Index: CRI≥80, SMCDS3
Smart Lighting: DALI on request

MATERIALI

Schermo: Vetro comfort
Corpo: Pressofusione di lega d'alluminio, palo in alluminio estruso
Lenti: PMMA ad alta trasparenza (bollard)
Colori: Sablé100 Noir
Finitura: Fosforocromatazione e verniciatura in polveri di poliestere realizzata in 16 fasi per la miglior resistenza agli agenti atmosferici

MATERIALS

Screen: Glass comfort
Body: Die-cast aluminium alloy, aluminium extruded pole
Lenses: PMMA High transparent (bollard)
Colours: Sablé100 Noir
Finish: Phospho-chromatation treated and polyester powder-coated in 16 phases to increase weather resistance


CARATTERISTICHE

Peso massimo: 2kg (applique), 4kg (bollard 500), 6kg (bollard 1000)
Alimentazione elettronica: Incluso
Precablaggio: Incluso
Installazione: Parete, terra

FEATURES

Max Weight: 2kg (applique), 4kg (bollard 500), 6kg (bollard 1000)
Electronic Power Supply: Included
Pre-wiring: Included
Installation: Wall, ground


OTTICHE OPTICS

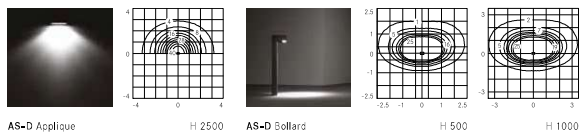


Lit XS Applique



Bollard 500



Bollard 1000



ACCESSORI ACCESSORIES

06LX931J0
Kit tirafondi
Kit metal anchors



06KS918C0
Connettore 2 vie IP68
2-way connector IP68



06KS909C0
Connettore 4 vie IP68
4-way connector IP68





Codici prodotto pg. 76 - Product Codes p. 76

Lit XS Applique – Bollard




Configurations: Lit XS Applique and Bollard

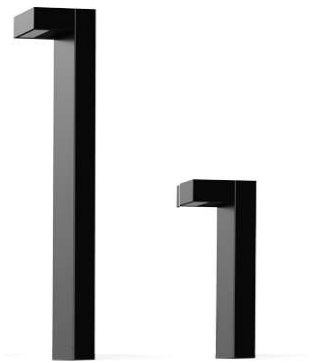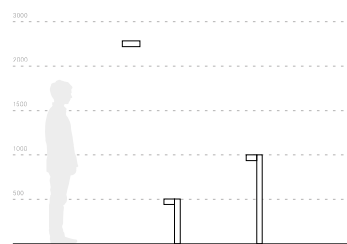


Product Codes

Lit XS Applique Cariboni



Code	Source	W	lm	K	Cat. Optics	Optics	Color	Kg
06LX1A20C5C	LED	9,5W	710lm	4000K	As. Wide	AS-D	Sablé100	2
06LX1A29C5C	LED	9,5W	710lm	3000K	As. Wide	AS-D	Sablé100	2

Lit XS Bollard Cariboni

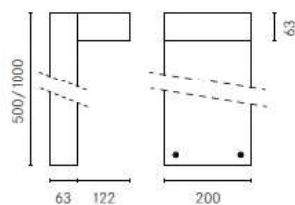

Code	Source	mA	W	lm	K	Cat. Optics	Optics	Color	Kg
06LX2A20C5C*	LED	500mA	4,2W	685lm	4000K	As. Wide	AS-D	Sablé100	4
06LX2A29C5C*	LED	500mA	4,2W	640lm	3000K	As. Wide	AS-D	Sablé100	4
06LX3A20C5C**	LED	500mA	4,2W	685lm	4000K	As. Wide	AS-D	Sablé100	6
06LX3A29C5C**	LED	500mA	4,2W	640lm	3000K	As. Wide	AS-D	Sablé100	6

* H 500 / ** H 1000